

The eMotionMix is a very versatile dynamic mixing system for the use in bonding, sealing as well as in casting/encapsulation applications.

The modular design of the mixing chamber allows to use from micro up to large quantities of about more than one litre per minute.


The mixer geometry has been optimized to ensure high quality mixing results while keeping shear-heat in the material at a minimum. Also, the mixer can be cleaned without residues with minimum use of cleaning agents.

Through its alternative sealing concepts, eMotionMix can process from low-viscous casting materials to higher viscous sealants.

eMotionMix is ideal for use of materials with extreme mixing ratios or extreme deviations in viscosities.

## POWERFUL SERVO DRIVE

- Controlled and constant rpm
- Constant homogeneous quality
- For all sensitive applications

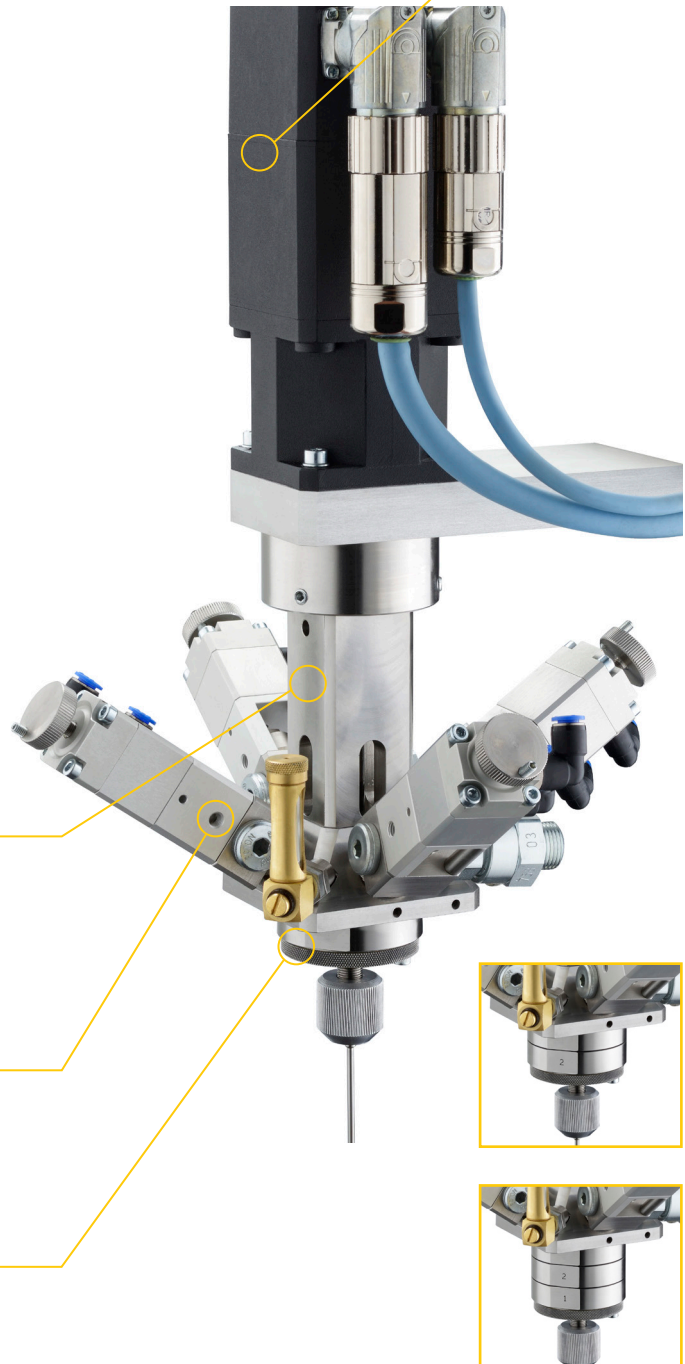

## ALTERNATIVE SEAL PACKINGS

- Optimized for different materials
- Optional with blocking liquid
- Longer service life

## UP TO 4 VALVES

- Modular construction
- Different sizes

## MODULAR MIXING CHAMBER

- Adaptable for different sizes
- Different flow rates
- "Easy-clean"-concept

Chamber size*	5 cm <sup>3</sup>	7.5 cm <sup>3</sup>	10 cm <sup>3</sup>
Mixer speed (rpm)	< 3,000		
Max. output performance (ccm/min)	50 - 500	100 - 750	200 - 1.000

\*Other sizes available upon request



# YOUR GLOBAL PARTNER IN **METERING AND MIXING TECHNOLOGY**

- Processing and application of single and multi component adhesive and sealants
- Ambient or temperature conditioned equipment
- Complete systems for manual or fully automatic processes
- Innovative process control and verification